


DETALLE DE CARGA DEL TABLERO SECCIONAL 2

CIRCUITO	APLIQUE LED	PROYECTOR LED RGB	BALIZA LED	FAROLA DOBLE	TOMAS DE SIMPLE	CORRIENTE SCHUKO	TOTAL
#	12W	10W	10W	2x100W	200W	500W	WATTS
#2.1			12x10W				120W
#2.2			6x10W				60W
#2.3			6x10W				60W
#2.4			16x10W				160W
#2.5		2x10W					20W
#2.6				2x200W			400W
#2.7	6x12W						72W
#2.8					6x200W		1200W
#2.9					6x200W		1200W
#2.10					6x200W		1200W
#2.11						3x500W	1500W
#2.12						3x500W	1500W
#2.13						3x500W	1500W
SUMA	72W	20W	400W	400W	3600W	4500W	8992W

DETALLE DE CARGA DEL TABLERO SECCIONAL N°3


CIRCUITO	FAROLA LED	FAROLA DOBLE	TOMAS DE SIMPLE	CORRIENTE SCHUKO	TOTAL
#	60W	2x100W	200W	500W	WATTS
#3.1	11x60W				660W
#3.2	5x60W				300W
#3.3		2x200W			400W
#3.4			6x200W		1200W
#3.5			6x200W		1200W
#3.6			6x200W		1200W
#3.7				3x500W	1500W
#3.8				3x500W	1500W
#3.9				3x500W	1500W
SUMA	960W	400W	3600W	4500W	9460W

ESQUEMA DEL TABLERO SECCIONAL N°2

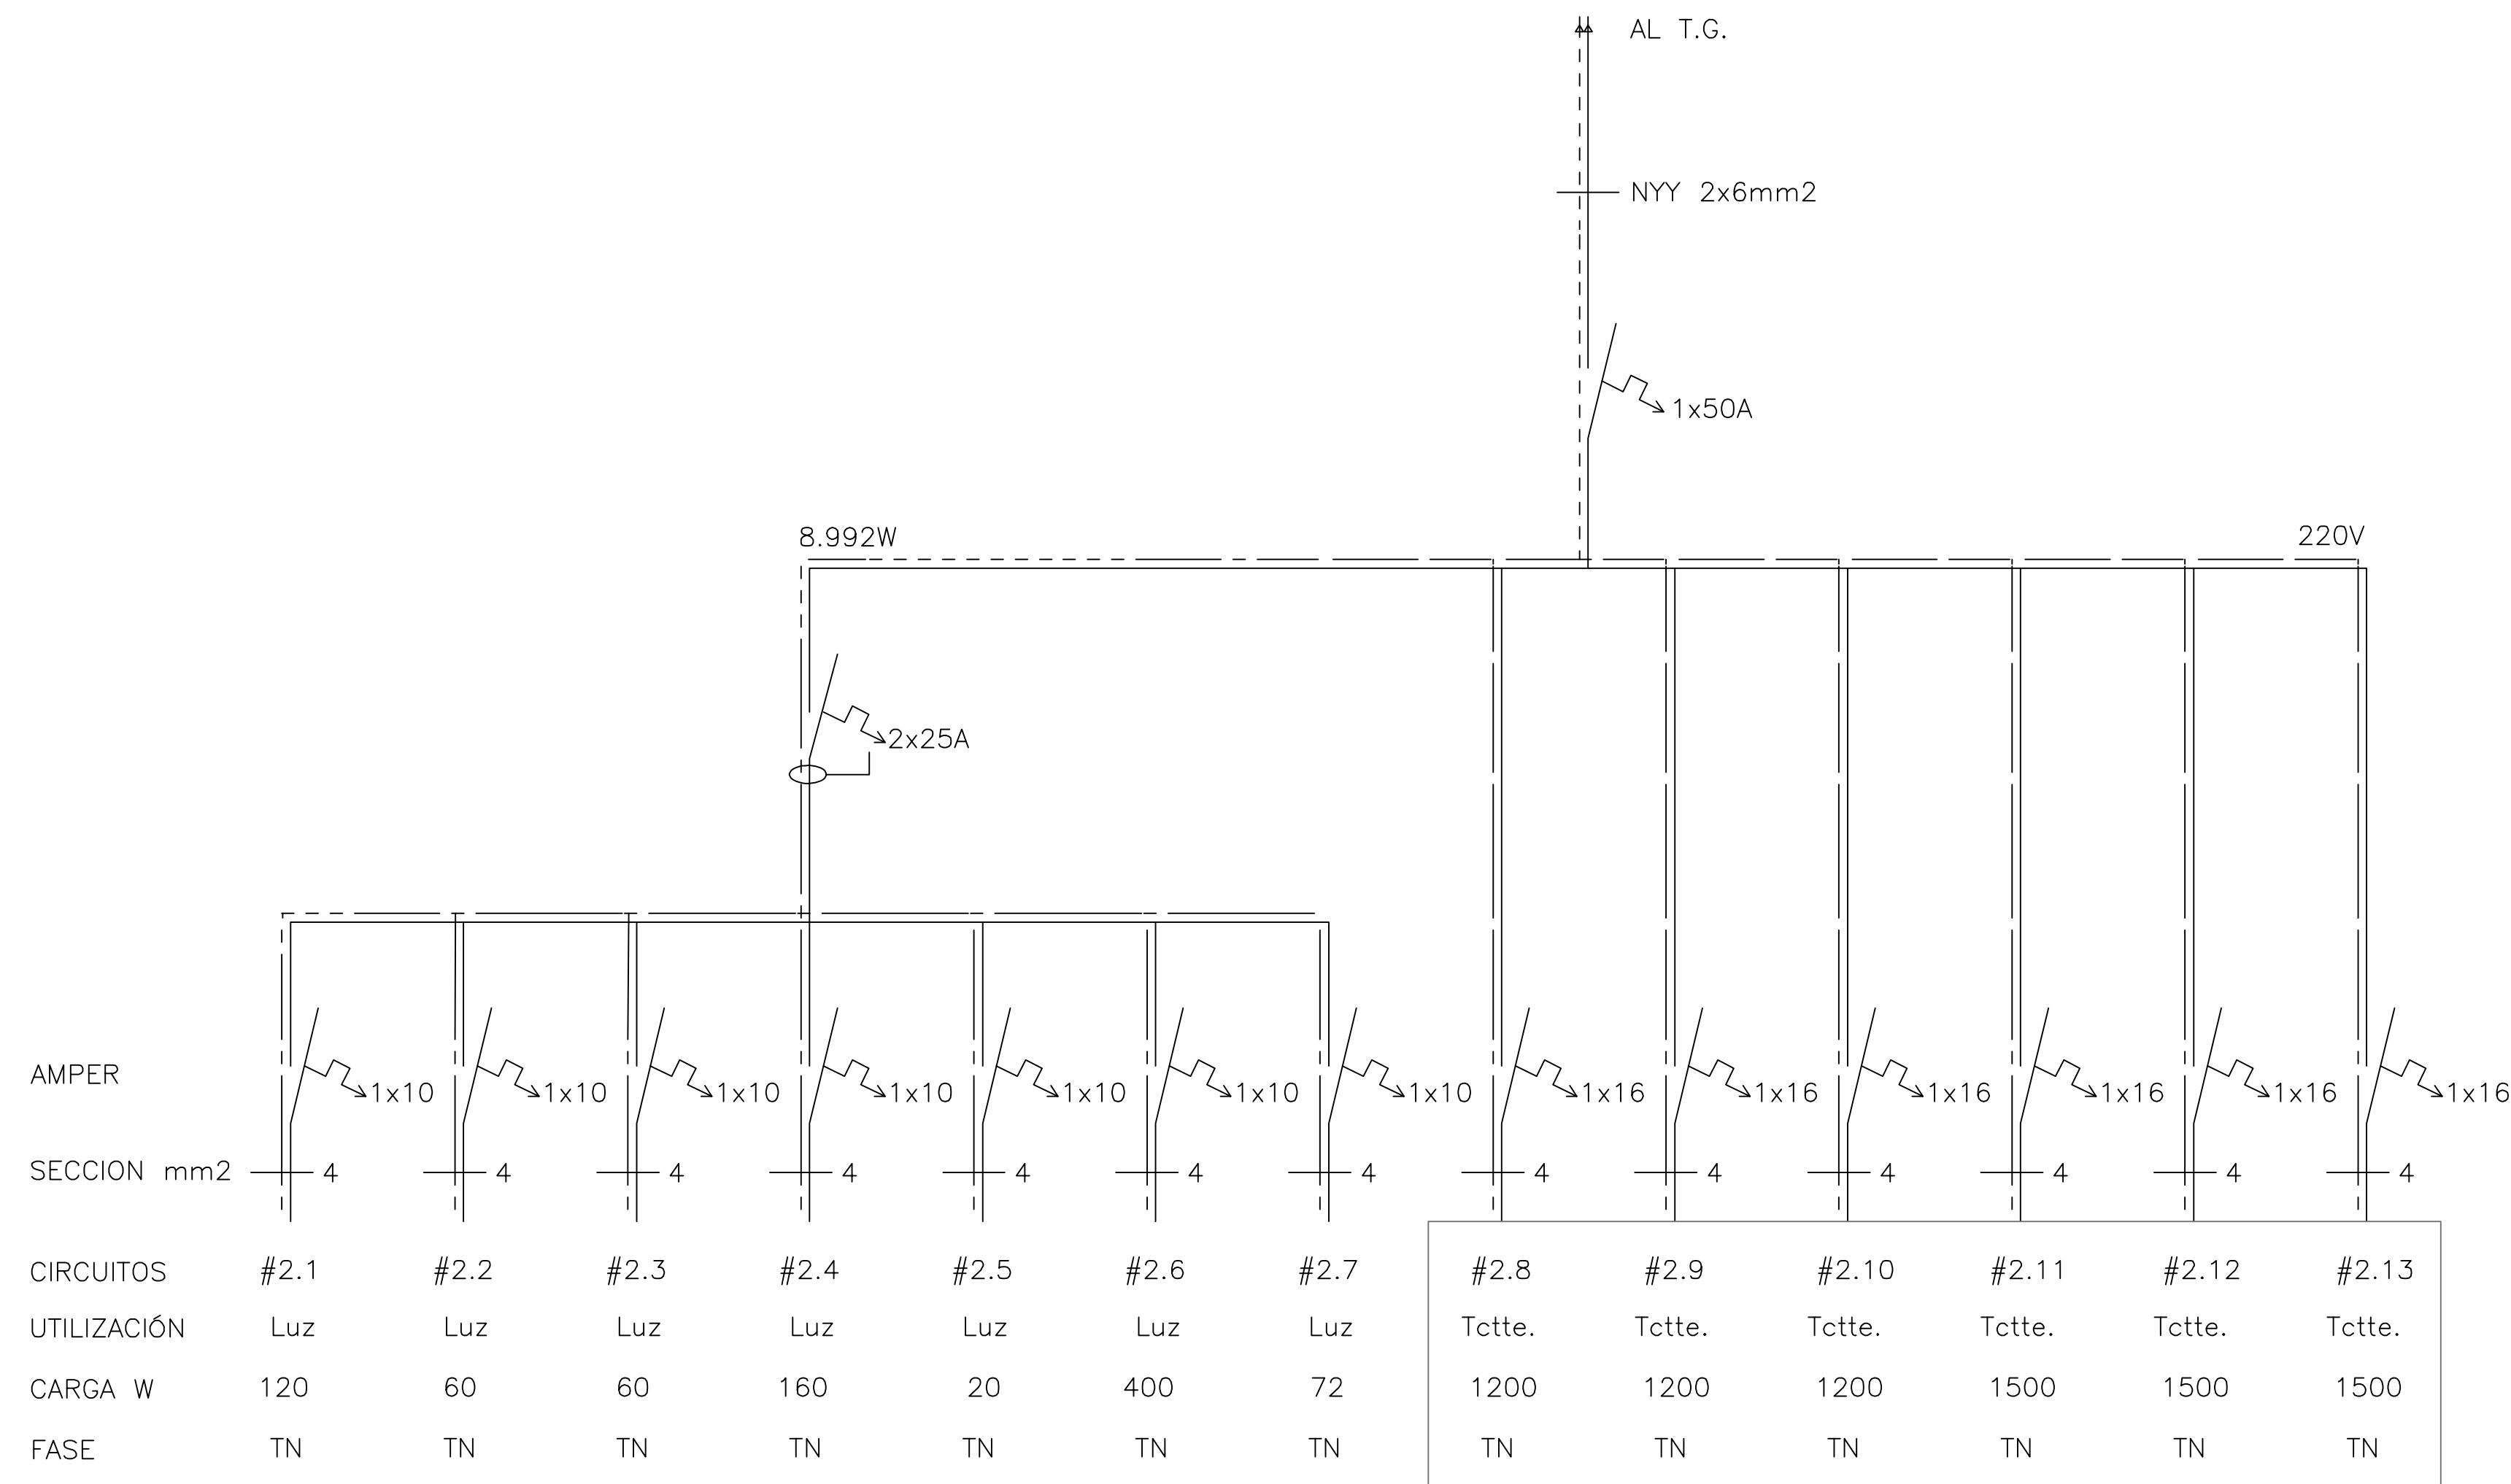

TABLERO DE TOMAS DE CORRIENTE

ESQUEMA DEL TABLERO SECCIONAL N°3

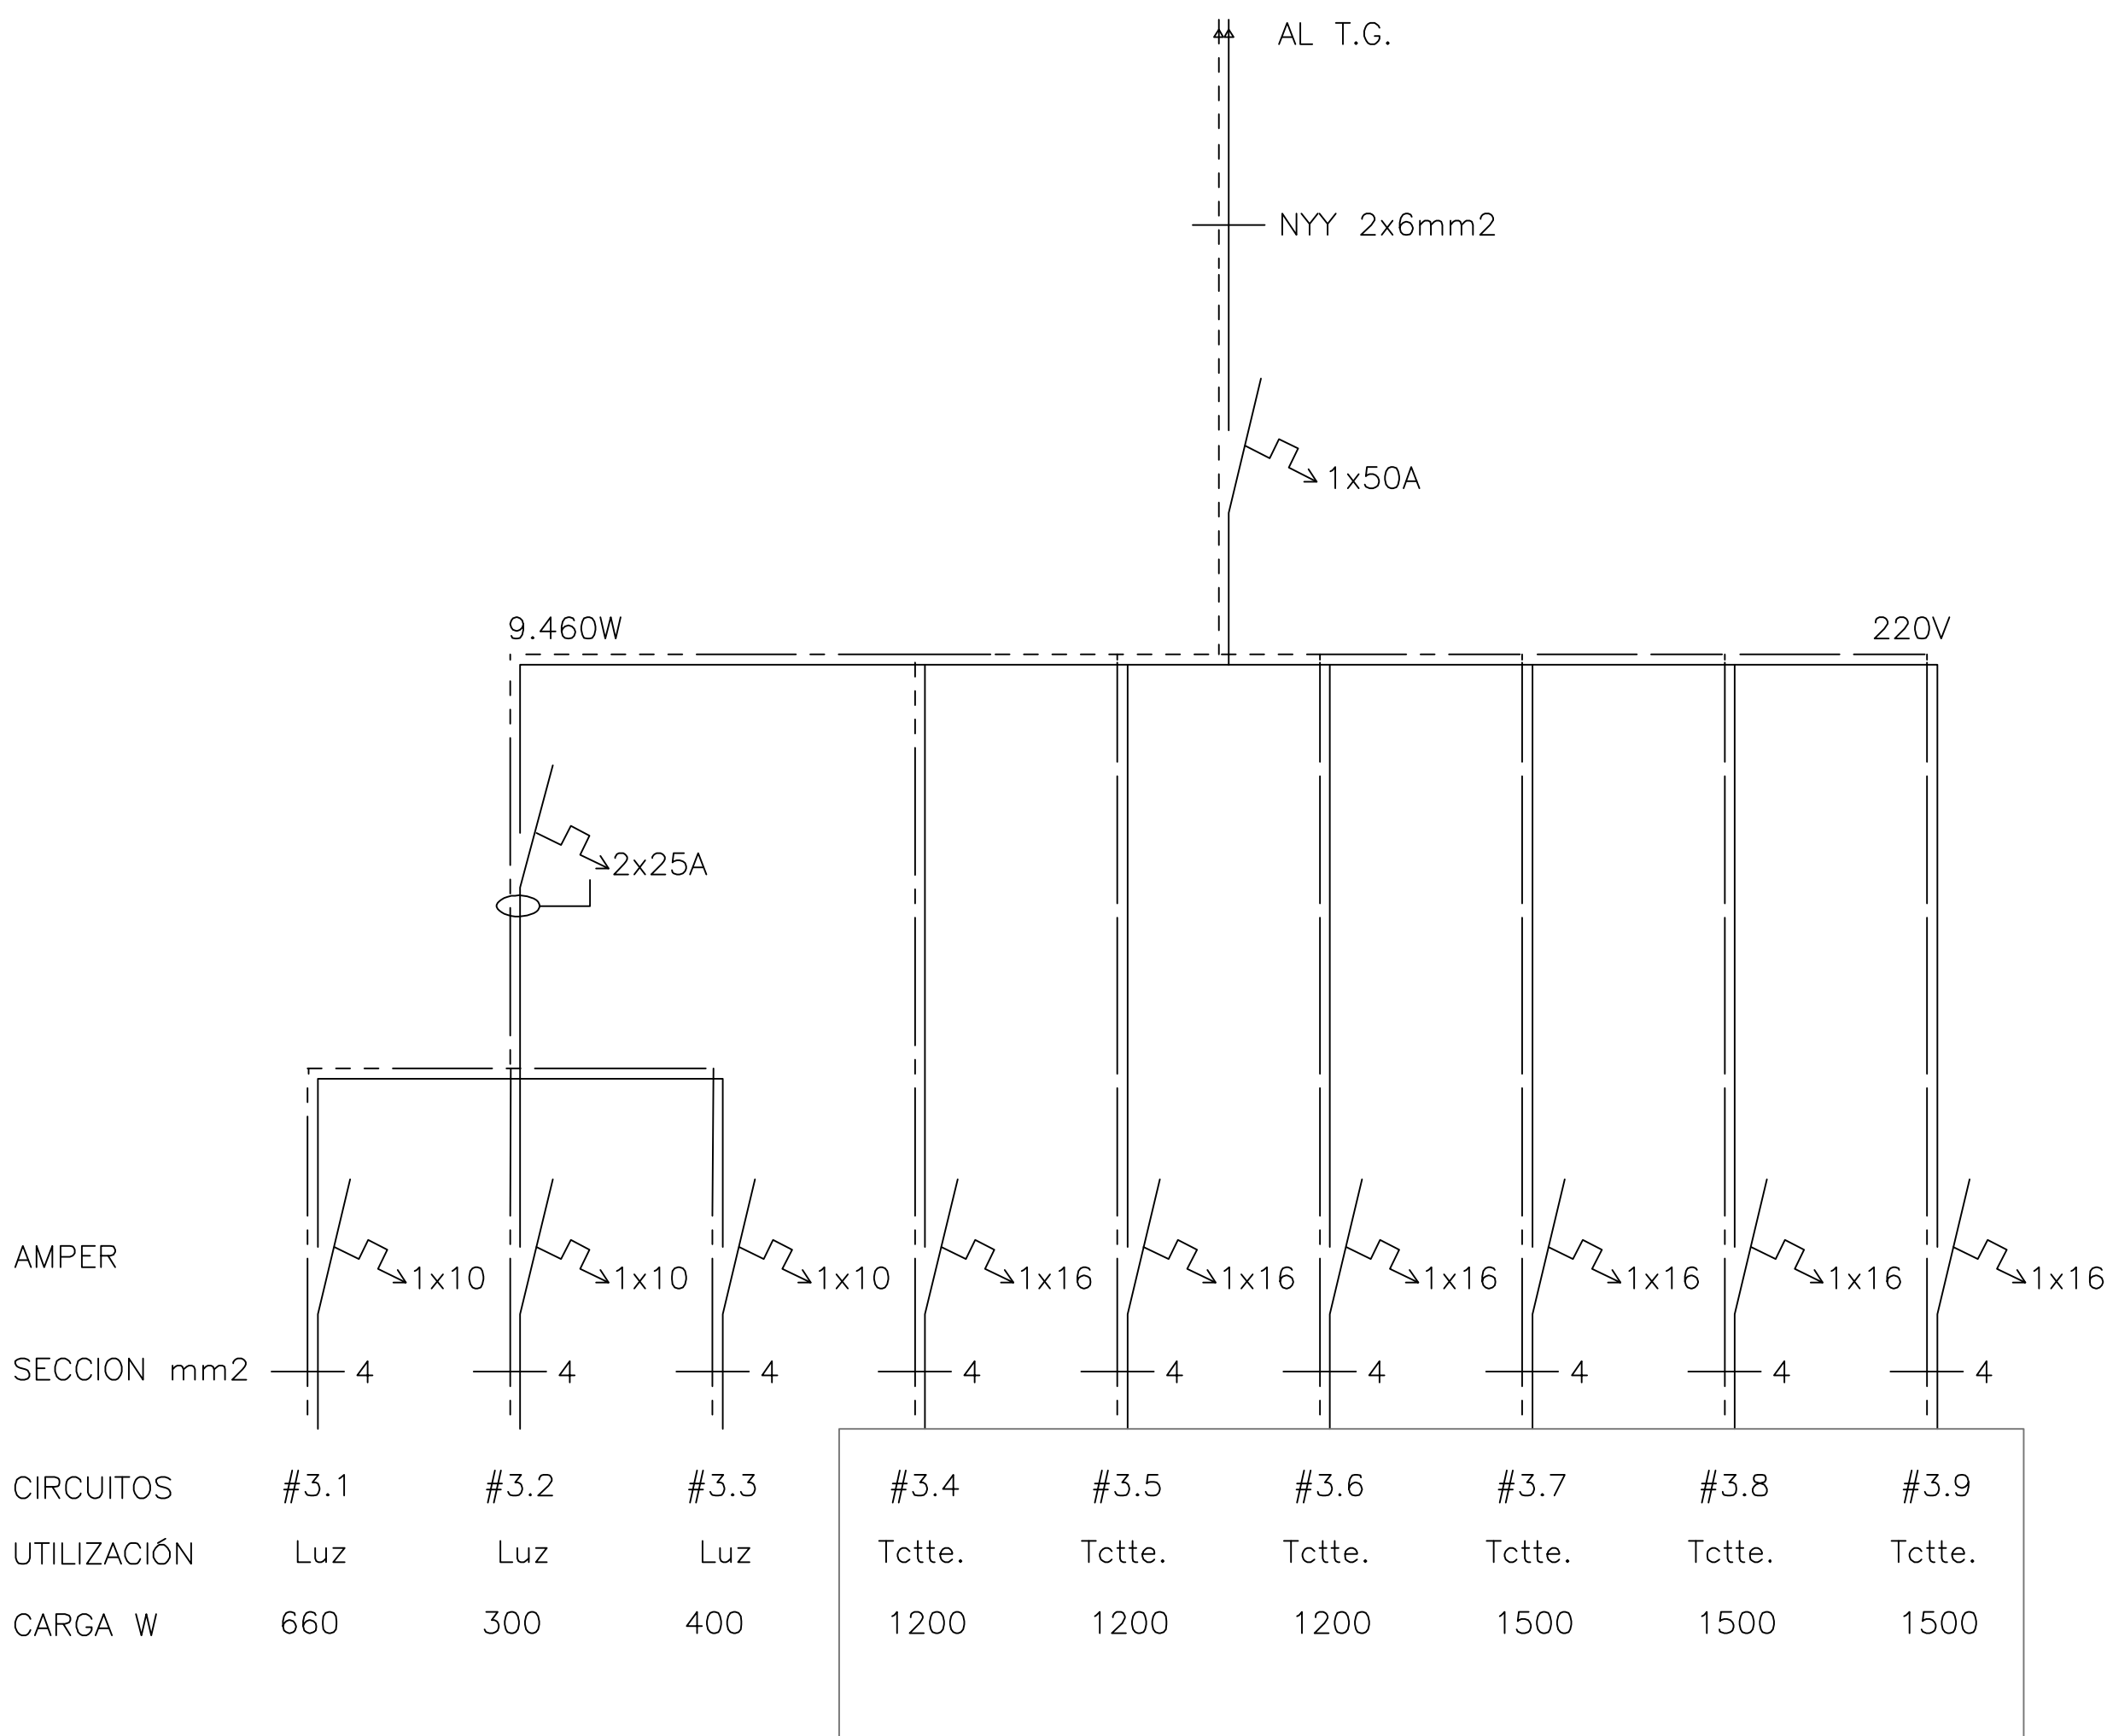

TABLERO DE TOMAS DE CORRIENTE

ESQUEMA DE TABLEROS SECCIONALES